TONE YOUR WAY

AUDIO

STRAIGHT FLUSH

AUDIO

vsaudio.com

STRAIGHT FLUSH

DESCRIPTION

- Single channel overdrive recreates tube saturation
- LOW Gain switch is a dynamic, touch responsive with tone clarity overdrive.
- HIGH Gain switch channel is a creamy and rich amp-like distortion with natural compression.
- Combines two circuits of the "Royal Flush" dual overdrive in a single pedal.
- Parallel mode relay switching.
- True Bypass.

POWER

The Vs Audio Straight Flush is powered by any 9 volt AC adapter or any multi-power supply brick for effect pedals (recommended power supply output 9V DC 100mA) center negative polarity.

OPERATION

- Run a cable from your guitar to the Vs Audio "Straight Flush" INPUT jack and run another cable from the Vs Audio "Straight Flush" OUTPUT jack to your amplifier.
- Start with all controls at 12 o´ clock.
- Turn the effect on by pressing the footswitch. Parallel mode relay switching behaves like a standard footswitch plus the ability "HOLD-RELEASE" feature. Press and hold the relay switch, instantly the effect turns on, release the switch, instantly the effect is bypassed.
- Rotate the VOLUME knob clockwise or counterclockwise to maintain unity volume with clean signal.
- Rotate the TONE knob clockwise to boost high frequencies or counterclockwise to decrease them.
- Rotate the GAIN knob clockwise to increase the amount of distortion or counter clock wise to decrease it.
- Use the switch to toggle between LOW Gain mode and HIGH Gain mode.

SPECIFICATIONS

Input Impedance	1MΩ
Output Impedance	<1kΩ
Noise Floor	-90dBV
Bypass	True Relay Switched
Current Draw	14mA
Power Supply	9volts DC

CONTROLS

1 **VOL** knob controls the output of the effect.

2 **GAIN** knob controls the amount of distortion

3 **TONE** knob shapes overall EQ of overdrive.

4 **SWITCH** selects overdrive circuit.

5 **FOOTSWITCH** toggles effect on/bypass (LED indicates on).
When the effect is off and the button is pressed and held more than 2 seconds, the effect turns on for as long as the button is pressed. With the release of the button the effect turns off (Parallel Mode).

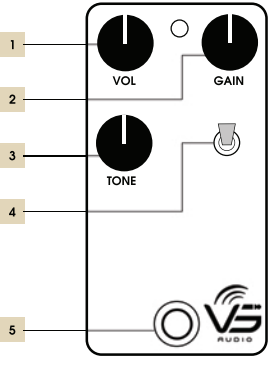

SAMPLE SETTINGS

VS AUDIO
4 MAVROMATEON Str, ILION
ATHENS, GREECE